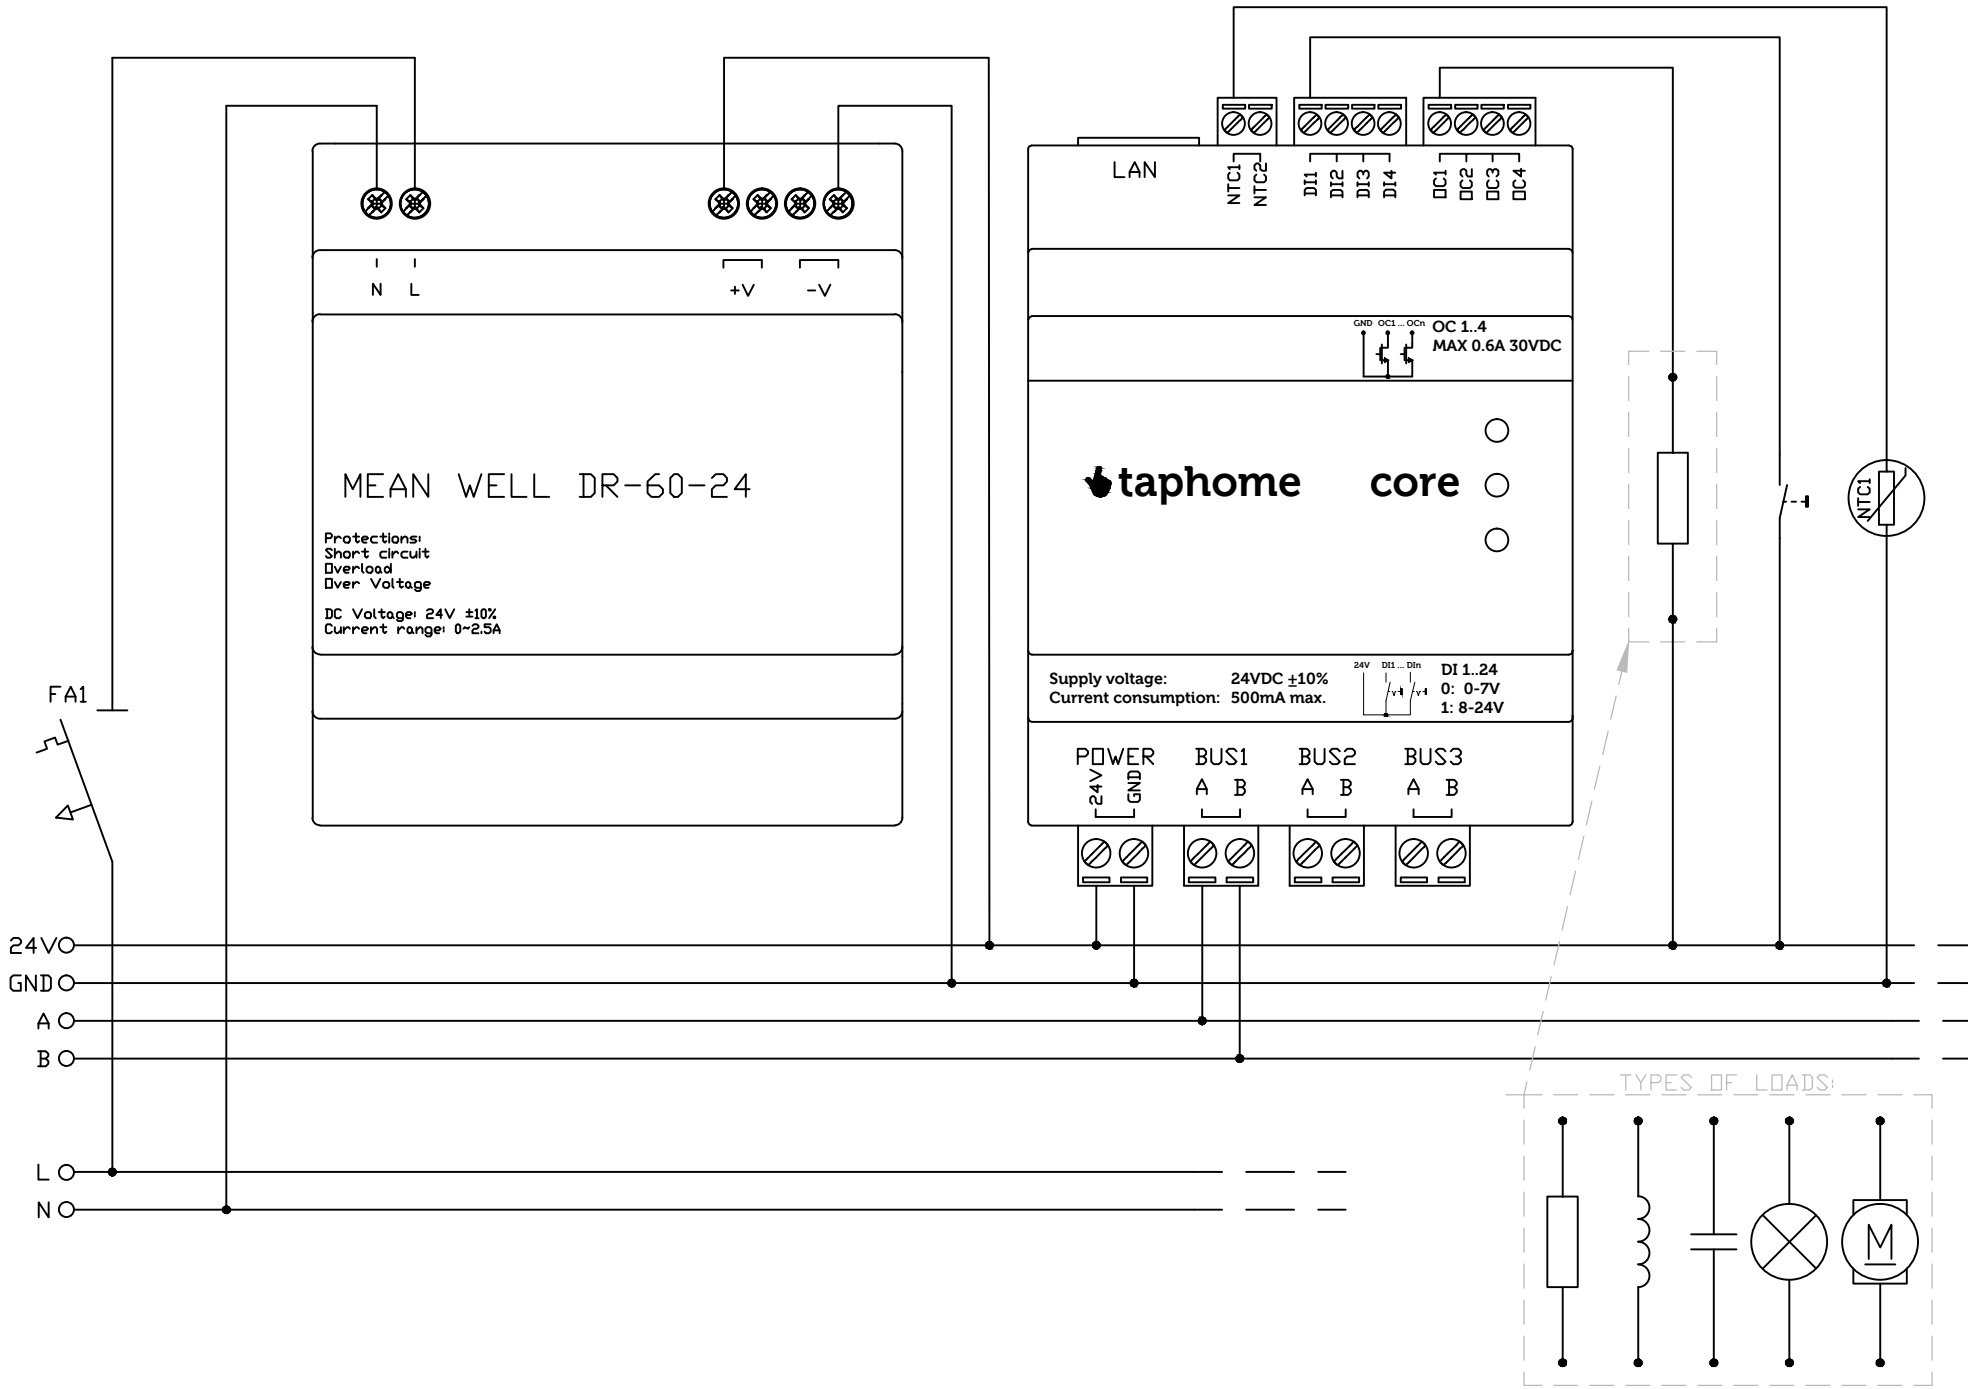
MEAN WELL DR-60-24
Protections:
Short circuit
Overload
Over Voltage
DC Voltage: 24V ±10%
Current range: 0~2.5A
N
L
+V
-V
LAN
NTC1
NTC2
DI1
DI2
DI3
DI4
OC1
OC2
OC3
OC4
GND
OC1 ... OCn
OC 1..4
MAX 0.6A 30VDC
taphome
core
Supply voltage: 24VDC ±10%
Current consumption: 500mA max.
24V
DI1 ... DIn
DI 1..24
0: 0-7V
1: 8-24V
POWER
24V
GND
BUS1
A
B
BUS2
A
B
BUS3
A
B
NTC1
FA1
24V
GND
A
B
L
N
TYPES OF LOADS:
M